COMBi-SL 4500-6000

COMBiLiFT
LiFTING INNOVATION

The 3 wheel sideloader forklift designed for the safe, space saving and productive handling of long and bulky loads.

Combi-SR: Rear Mounted Cabin

COMBi-SL 4500-6000

SIDE VIEW

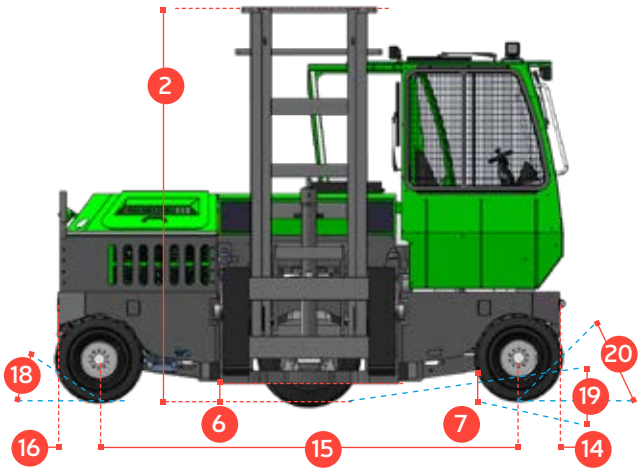

FRONT VIEW

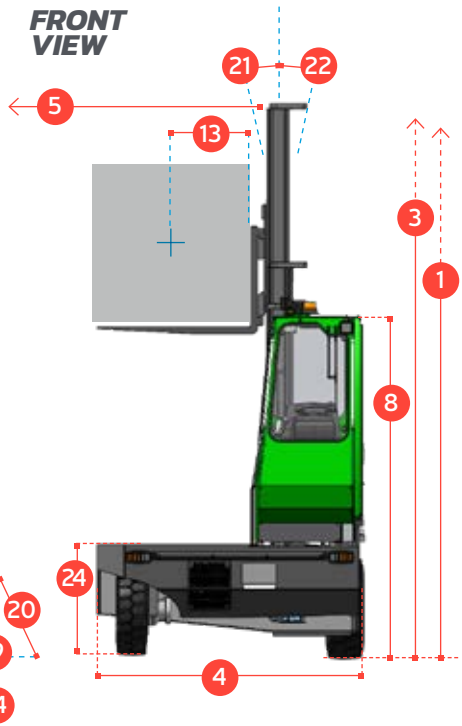

OVERHEAD VIEW

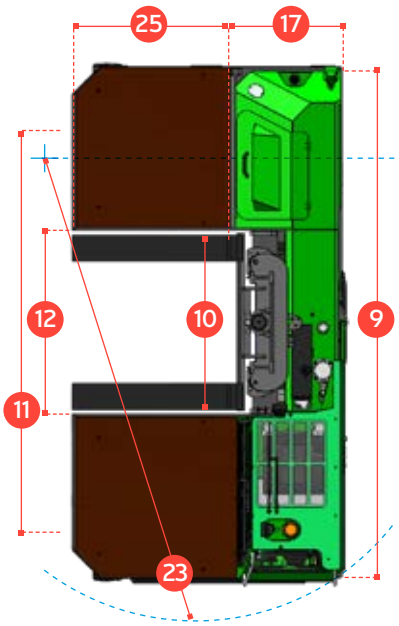

REF.	DESCRIPTION	4500 SL	5000 SL	6000 SL
1a	Standard Lift Height		4040mm	
1b	Free Lift Height		0mm	
2	Height Mast Closed		3000mm	
3	Max. (Mast raised)		5200mm	
4	Overall Length	2050mm	2050mm	2250mm
5	Mast Travel	1290mm	1290mm	1490mm
6	Ground Clearance Under Mast		300mm	
7	Ground Clearance to Centre of Wheelbase		335mm	
8	Height Over Cab (Without work lights)		2670mm	
9	Width		3900mm	
10	Outside Spread of Fork Arms		1350mm	
11	Track Front		3258mm	
12	Frame Opening		1400mm	
13	Load Centre Distance		600mm	
14	Overhang Front		320mm	
15	Wheelbase		3260mm	
16	Overhang Back		320mm	
17	Length From Face of Fork		850mm	
18	Approach Angle		45°	
19	Ramp Angle		18°	
20	Departure Angle		45°	
21	Forward Tilt		3°	
22	Backward Tilt		5°	
23	Minimum Outside Radius		2590mm	
24	Platform Height (Optional 750mm)		850mm	
25	Platform Length	1200mm	1200mm	1400mm

A	Capacity	4500 kg	5000 kg	6000 kg
B	Unladen Weight	9800 kg	9900 kg	10,200 kg
C	Maximum Ground Speed		20 km/h	
D	Gradeability		15%	
E	Deutz TCD 3.6L / 4.3 ltr GM LPG		55 kW / 72 kW	
F	Electrics		12 Volt	
G	Fork Section 50mm x 200mm	1200mm	1200mm	1400mm
H	27 x 10 - 12 Front Tyre		OD 680mm / Width 255mm	
I	355 / 65 - 15 Rear Tyre		OD 800mm / Width 295mm	
J	Standard Colour		Green & Grey	
K	Suspension Seat		KAB Model 116	

rev. 1.1

Multi-Directional

Features Include:

- Rubber Mounted Cabin
- Multi-Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way Lever Positioning of Wheels
- Hydraulic Oil Cooler

Distributed by:

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.

CO. MONAGHAN
IRELAND

+353 47 80500
INFO@COMBILIFT.COM

combilift.com