COMBi-GT 3,000

COMBiLiFT
LiFTING INNOVATION

The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.

COMBi-GT 3,000

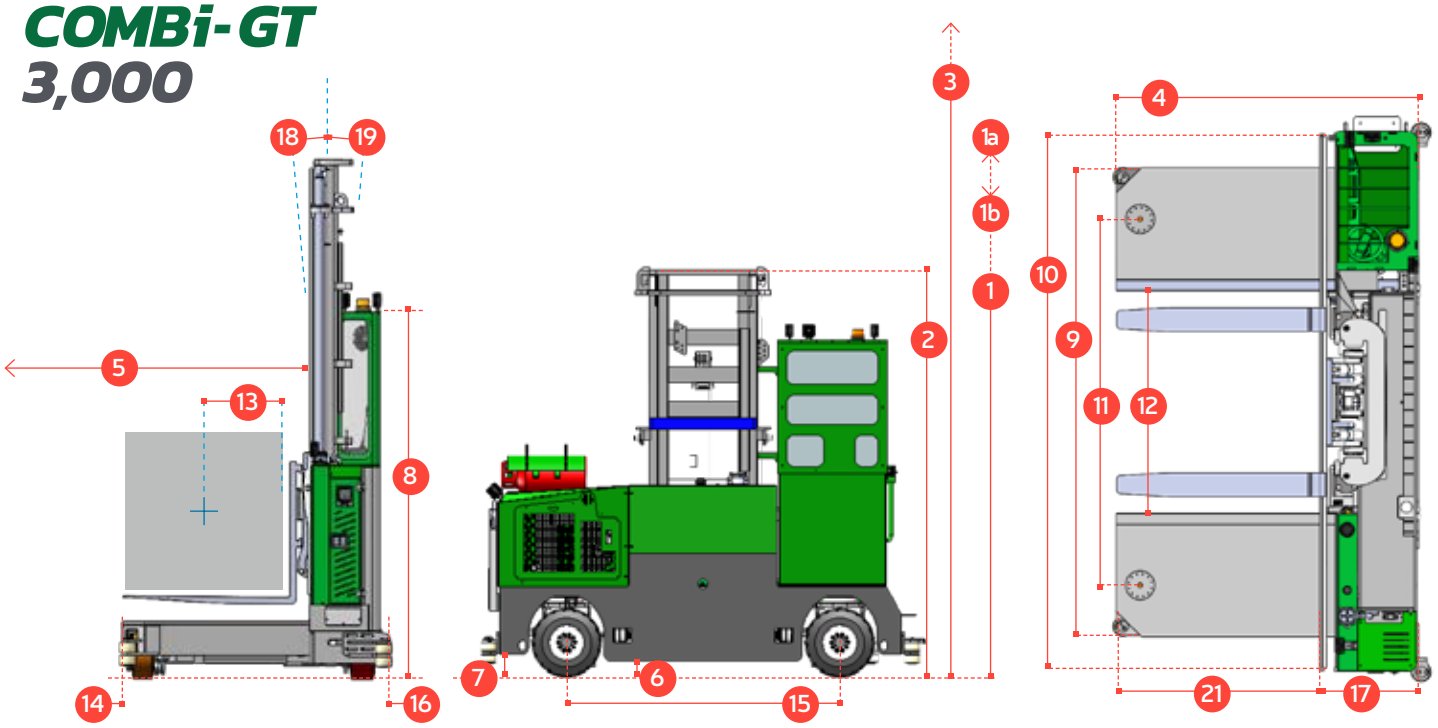

REF.	DESCRIPTION	C3,000 GT (mm)						
1a	Lift Height	6300						
1b	Free Lift Height	2642						
2	Height Mast Closed	3988						
3	Max. Mast Raised	7696						
4	Overall Length	1270	1422"	1575	1727	1880	2032	2185
5	Mast travel	660	812	965	1117	1270	1422	1575
6	Ground Clearance Under Mast	27						
7	Ground Clearance to Center of Wheelbase	27						
8	Height Over Cab (without work lights)	2895						
9	Width Across Platforms	2946						
10	Outside Spread of Fork Arms	3327						
11	Wheelbase	2286						
12	Frame Opening	1397						
13	Load Center Distance	304	381	457	33	609	609	609
14	Overhang Front	52						
15	Track	965	1117	1270	1422	1575	1728	1880
16	Overhang Back	52						
17	Length from Face of Fork	660						
18	Forward Tilt	3°						
19	Backward Tilt	4½°						
20	Platform Height (with front lowered)	406.4						
21	Platform Length	610	762	915	1066	1220	370	1524
A	Capacity	3,000 kg						
B	Unladen Weight	8165kg	8391kg	8618kg	8845kg	9071kg	9298kg	9525kg
C	Maximum Ground Speed	7½ mph						
D	Gradeability	10%						
E	3 ltr GM LPG	65 HP						
F	Electrics	12 Volt						
G	Fork Section 50 x 150 x	15494	19355	23241	27076	30988	9398	38710
H	350 / 150 - 280 Front Tire (Solid) x2	OD 355mm / Width 152"						
I	400 x 178 - 300 Rear Tire (Super Elastic) x2	OD 584 / Width 254						

Distributed by:

Features Include:

- Rubber Mounted Overhead Guard
- 4 Wheel Steering
- Load Sensing Steering
- 2 Wheel Hydrostatic Drive
- Tilting Chassis +/- 12 mm at front
- Hydraulic Oil Cooler

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.

CO. MONAGHAN
IRELAND
+353 47 80500
INFO@COMBILIFT.COM
combilift.com